


Front

These steps are easier to do after removing the spring from the strut.



- Pull down on the front bump stop to release it from the strut mount.

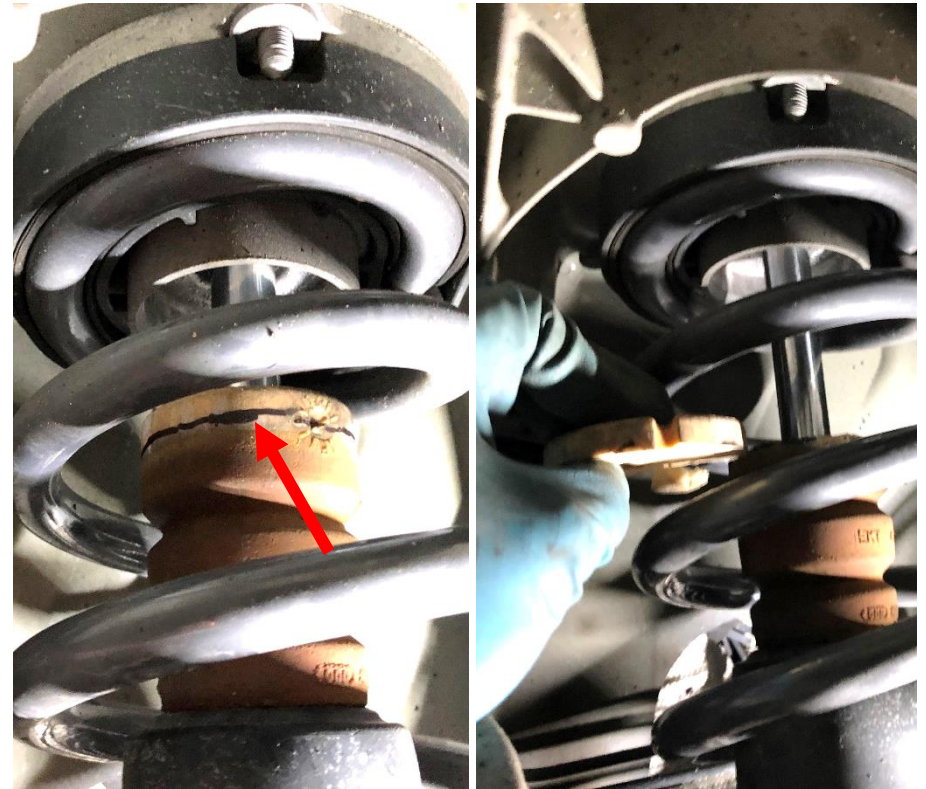

- Mark a line 10mm (0.4") from the top of the bump stop.
- Use a razor blade to cut around the line.
- Push the remaining bump stop back into the shock mount.
- Do the same to both sides of the car.

Rear

- Pull down on the rear bump stop to release it from the strut mount.



- Mark a line 20mm (0.79") from the top of the bump stop.
- Use a razor blade to cut around the line.
- Cut a slit from the top of the bump stop to the line to make an opening to pull the bump stop section off the shock.